


# 41870

## SS Drain

### 16" Square Top, 14" Deep

#### Specification

Josam series 41870 fabricated stainless steel (type 304), 16" square top, 14" deep, with no-hub bottom outlet, anchor tabs and perforated SS grate (standard).

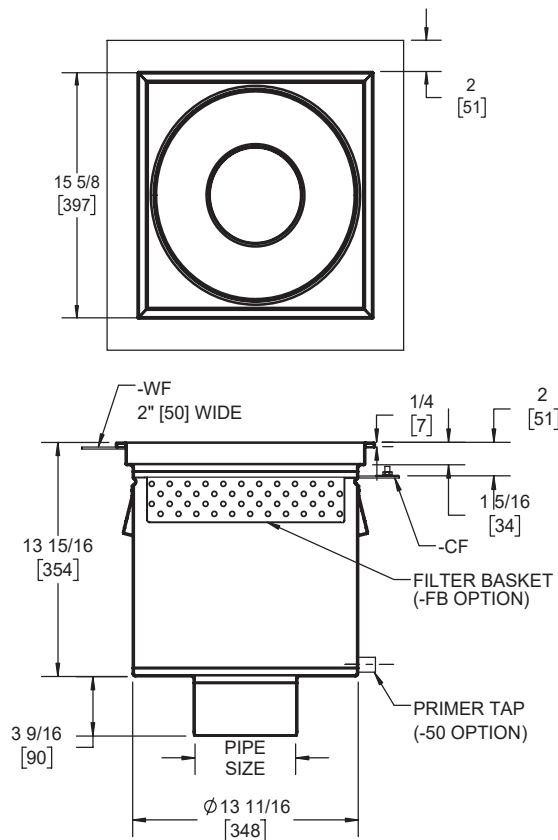

STANDARD GRATE  
FREE AREA = 75.4 IN<sup>2</sup>  
MEETS ADA AND HEEL-PROOF REQMT.

#### OPTIONS:

-CF	Clamp and flange
-WF	Wide flange
-FB	Filter basket
-FBD	Filter basket, deep (8")
-SB	Sediment bucket
-SBD	Sediment bucket, deep (8")
-VP	Secured grate
-50	1/2" primer tap
-BW	Butt-weld outlet (spec. 10, 40, 80)
-T	Threaded outlet

-PFO	Push-Fit outlet size
-DB	Dome bottom strainer
-NG	No grate
-HG	Perf. half grate
-3Q	Perf. 3/4 grate
-MG	Mesh, anti-slip grate
-LG	Ladder grate
-SG	Perimeter slot grate
-316	Type 316L material

Model	Pipe size
41874	4"
41876	6"
41878	8"

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

#### Notes:

